




## Technical Data

# *fino* collection Surface-Mounted Seat-Cover Dispenser

# B-9221

### Specify Finish Required

- ☐ Stainless Steel, Satin Finish
- ☐ Matte Black Finish, please use model no. B-9221.MBLK

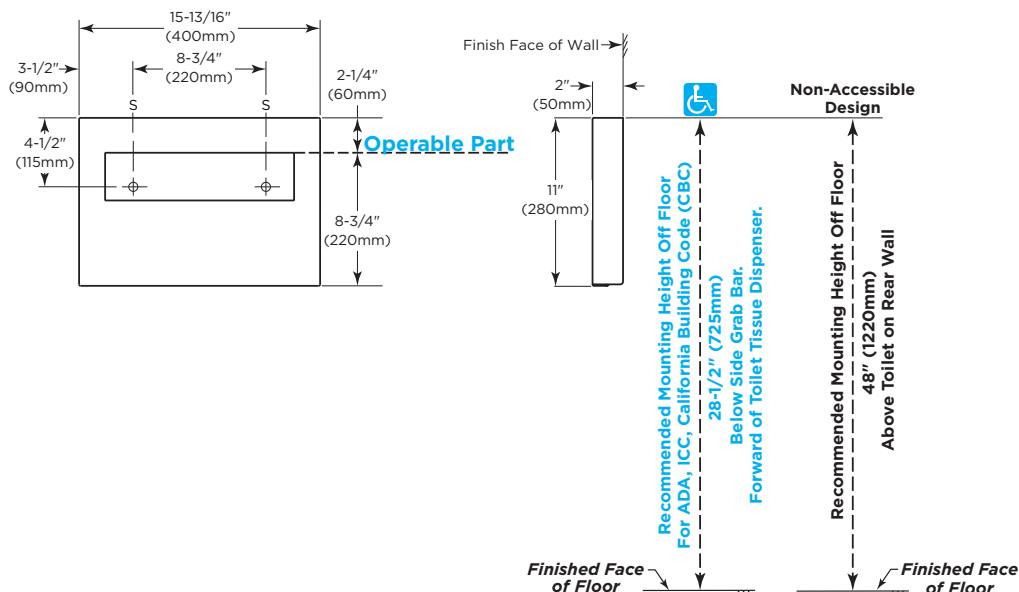

### ADA/ICC/CBC Installation Guidance

**\*Operable Part:** Top of toilet seat cover dispenser opening.

#### Maximum mounting height of Operable Part:

ADA/ICC: 48" (1220mm) above finished floor (AFF)

CBC: 40" (1015mm) above finished floor (AFF)

\*For more information regarding operable parts, please refer to Bobrick Planning Guide for Accessible Restrooms, page 9.

### MATERIALS:

18-8, type-304, 18-gauge (1.2mm) stainless steel with satin or matte black finish, as specified. Seam-welded construction with opening.

### OPERATION:

Dispenses single- or half-fold paper toilet seat covers from opening. Dispenser fills from bottom through concealed opening. Capacity: 250 toilet seat covers or one box.

**5-Year Limited Warranty** — Bobrick extends a limited 5-year warranty from the date of purchase on all parts for model B-9221. This warranty is limited to the repair or exchange of defective parts at the option of Bobrick and is only extended to the original owner of the installed unit against defects in factory workmanship or material under normal use and service.

### INSTALLATION:

Mount unit on wall or toilet partition with two flat-head screws, not furnished by manufacturer, at points indicated by an S. For plaster or dry wall construction, provide concealed backing that complies with local building codes, then secure unit with flat-head screws not furnished. For other wall surfaces, provide fiber plugs or expansion shields for use with screws, not furnished, or provide 1/8" (3mm) toggle bolts or expansion bolts.

Note: Provide a 5" (125mm) minimum clearance from bottom of dispenser to top of any horizontal projection to provide room for filling dispenser from bottom.

### SPECIFICATION:

Surface-mounted toilet seat cover dispenser shall be type-304, 18-gauge (1.2mm) stainless steel with all welded construction; exposed surfaces shall have satin or matte black finish, as specified. Dispenser shall have a concealed opening in bottom for filling. Capacity shall be 250 paper toilet seat covers or one box.

**Surface-Mounted Seat-Cover Dispenser shall be Model B-9221 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.**