





## Technical Data

# SURFACE-MOUNTED ROBE HOOK

**B-7671**  
**B-76717**  
**B-7671.MBLK**

### Specify Model Required:

- ☐ B-7671 Bright Polished stainless steel
- ☐ B-76717 Satin-finish stainless steel
- ☐ B-7671.MBLK Matte Black stainless steel

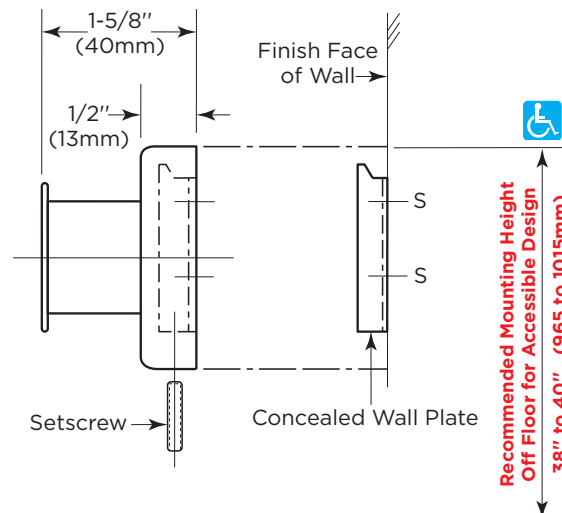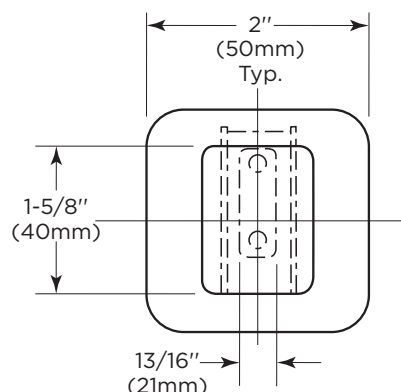

### MATERIALS:

**Flange & Support Arm** — 18-8, type-304, 22-gauge (0.8mm) stainless steel, finish as specified. Concealed, 18-gauge (1.2mm) stainless steel mounting bracket. All-welded construction. Secured to wall plate with a stainless steel setscrew.

**Concealed Wall Plate** — 18-8, type-304, 19-gauge (1.0mm) stainless steel.

**Cap** — 18-8, type-304, 14-gauge (2.0mm) stainless steel, finish as specified. Welded to the support arm.

### INSTALLATION:

To remove concealed wall plate from back of flange and mounting bracket, loosen setscrew. Mount wall plate so prongs are at top; secure with two sheet-metal screws, furnished by manufacturer, at points indicated by an S. Engage mounting bracket onto prongs of wall plate, then secure unit into position by tightening setscrew at bottom of flange.

For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws furnished. For other wall surfaces, provide fiber plugs or expansion shields for use with screws furnished, or provide 1/8" (3mm) toggle bolts or expansion bolts.

For partitions with particle-board or other solid core, secure with sheet-metal screws furnished, or provide through-bolts, nuts, and washers. For hollow-core metal partitions, provide solid backing into which the furnished sheet-metal screws can be secured.

### SPECIFICATION:

Surface-mounted robe hook shall be type-304 stainless steel with \_\_\_\_\_ (insert one: bright polished, matte black, or satin) finish. Flange and support arm shall be 22 gauge (0.8mm) and equipped with a concealed, 18-gauge (1.2mm) mounting bracket that is secured to a concealed, 19-gauge (1.0mm) wall plate with a stainless steel setscrew. Cap shall be 14 gauge (2.0mm), welded to the support arm.

**Surface-Mounted Robe Hook shall be Model \_\_\_\_\_ (insert model number) of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.**