




Technical Data

ClassicSeries® CONVERTIBLE AUTOMATIC UNIVERSAL ROLL PAPER TOWEL MODULE

3974-350

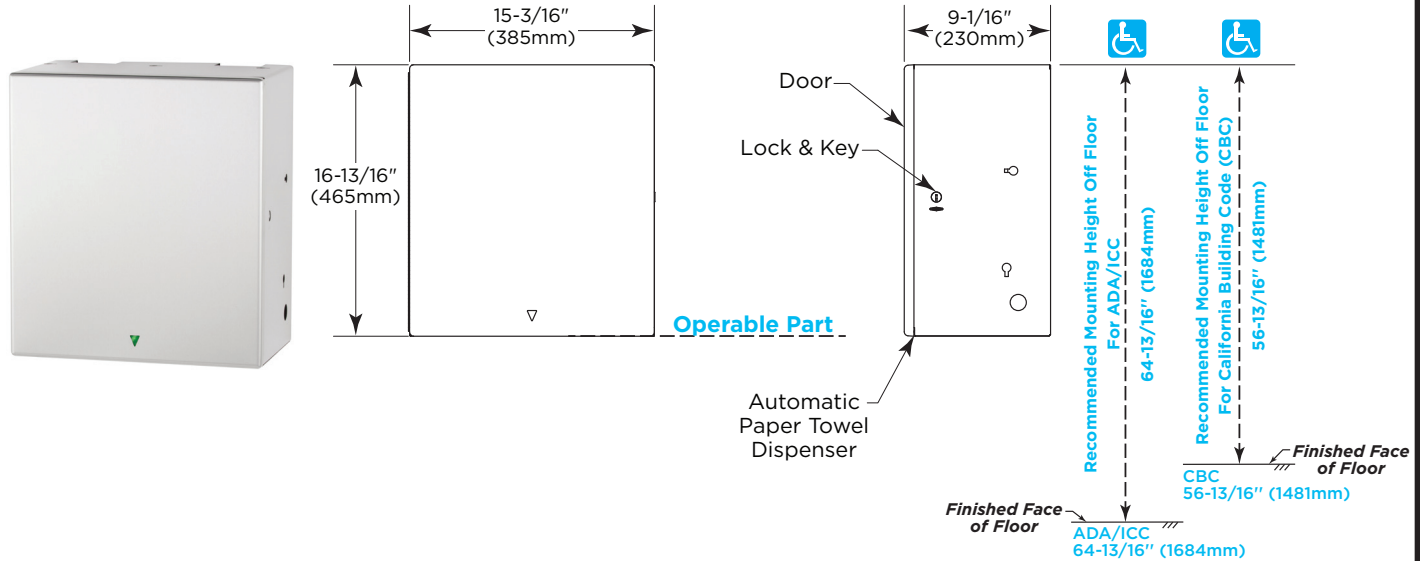

ADA/CBC Installation Guidance

***Operable Part:** Towel dispenser towel outlet

Maximum mounting height of Operable Part:
 ADA/ICC: 48" maximum above finished floor (AFF)
 CBC: 40" maximum above finished floor (AFF)

*For more information regarding operable parts, please refer to Bobrick Planning Guide for Accessible Restrooms, page 9.

MATERIALS:

Automatic Roll Towel Mechanism — Durable, high-impact resin materials. Accepts universal standard-core, non-perforated rolls 8" (205mm) wide, 8" (205mm) diameter, 800 ft (244 m) long. Dispenses one towel per dispense and can be set to dispense paper towels at three different lengths. Accommodates up to 3-1/2" (90mm) diameter stub roll with automatic transfer to full roll.

Cabinet — 18-8, Type-304, heavy-gauge stainless steel. All-welded construction. Exposed surfaces have satin-finish. Equipped with a tumbler lock keyed like other Bobrick washroom accessories.

Door — 18-8, Type-304, 20-gauge (0.9mm) stainless steel with satin-finish. Drawn, one-piece, seamless construction. Secured to cabinet with full-length, stainless steel piano-hinge.

OPERATION:

Adjustable (2", 3.5", 4") electronic sensor automatically dispenses towel when hands are placed under the towel opening. Intuitive LED light on door directs patrons to dispense area. Dispenses universal, 1-1/2" to 2" (38 to 51mm) diameter core, up to 8" (205mm) diameter, 8" (205mm) wide, non-perforated, non-proprietary paper towel rolls. LED light on the door flashes green when dispenser is ready to dispense, flashes slowly red to indicate it needs paper and red and green (alternating) to indicate low battery. Towel length can be set to short 10", medium 12" and long 14" lengths. Dispenser can be set to exposed or hidden mode which determines whether a paper towel hangs down when in idle mode. Customizable sensor can be set to 4", 6" or 8". Dispenser includes a 3-1/2" (90mm) diameter stub roll feature. Paper advance button dispenses paper when pressed. To adapt to changing needs of washrooms, this unit is field convertible with the Folded Towel Dispenser or (Mechanical) Universal Roll Towel Dispenser. To order convertible modules, reference part numbers below under Options.

continued . . .

Options:

- Folded Towel Dispenser Module convertible in field: order Bobrick Part No. 3944-152.
- (Mechanical) Universal Roll Towel Dispenser Module convertible in field: order Bobrick Part No. 3961-50.

POWER REQUIREMENTS:

Dispenser is powered by 4 "D" size alkaline batteries (not furnished) or an external 6-volt AC to DC switching power supply. Power supply is an optional accessory: order Bobrick AC Adapter Kit Part No. 3974-57. (For non-U.S. compatible plugs, order Part No. 3974-58).

INSTALLATION:

Remove existing dispenser module, then install new automatic universal roll towel module per Form No. 3974-269. For removal of Convertible Folded Towel Module refer to Form No. 3944-69. For removal of (Mechanical) Universal Roll Towel Dispenser Module refer to Form No. 3961-69. Open battery cover at the front of the dispenser and install 4 "D" size alkaline batteries. Select sheet length and "Paper Saver" mode using the switches to the right of the batteries. Load paper towel using the instructions on the dispenser.

Electrical supply for use with 6 volt AC to DC power supply must be installed per applicable building codes.

SPECIFICATION:

Convertible automatic universal roll paper towel module shall be Type-304 stainless steel with all-welded construction; exposed surfaces shall have satin-finish. Door shall be secured to cabinet with a full-length stainless steel piano-hinge and equipped with a concealed tumbler lock keyed like other Bobrick washroom accessories. Recessed convertible automatic universal roll paper towel dispenser and waste receptacle shall be Type-304 stainless steel with welded construction; exposed surfaces shall have satin-finish. Door shall be secured to cabinet with a full-length stainless steel piano-hinge and equipped with a concealed tumbler lock keyed like other Bobrick washroom accessories. No-touch dispenser, equipped with an intuitive LED light to direct patrons to the dispense area, dispenses universal, 1-1/2" to 2" (38 to 51mm) diameter core, up to 8" (205mm) diameter, 8" (205mm) wide, non-perforated, non-proprietary paper towel rolls. 800 ft (244 m) long. Dispenser automatically dispenses towel when hands are placed under the towel opening. Dispenser can be powered by 4 "D" size alkaline batteries or an optional 6-volt AC to DC power supply. Equipped with switches that allow paper length to be set at 10" (255mm), 12" (305mm) or 14" (355mm). Adjustable (2", 3.5", 4") electronic sensor automatically dispenses towel when hands are placed under the towel opening. LED light on the door flashes green when dispenser is ready to dispense, flashes slowly red to indicated it needs paper and red and green (alternating) to indicate low battery. Automatic transfer shall dispense stub roll up to 3-1/2" (90mm) diameter before new main roll is automatically dispensed.

Convertible Automatic Universal Roll Paper Towel Module shall be Model 3974-350 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Limited, United Kingdom.